




LABEL (铭牌):

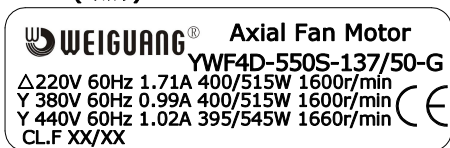


WIRING DIAGRAM (接线图):

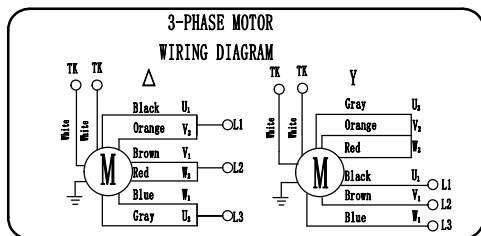

FLOW RATE CURVE (风量曲线):

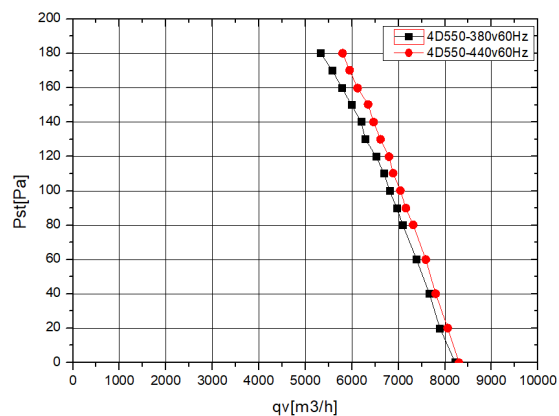

UNIT 类型	Axial fan motor		
MOTOR 电机型号	Three phases motor		
MOTOR TYPE 电机型号	YWF4D-550S-137/50-G		
VOLTAGE 额定电压 (V)	△220	Y380	Y440
FREQUENCY 频率 (Hz)	60	60	60
INPUT POWER 输入功率 (W)	515	515	545
CURRENT 电流 (A)	1.71	0.99	1.02
SPEED 转速 (r/min)	1600	1600	1660
AIR FLOW 20Pa 风量 (m³/h)	7890	7890	8059
NOISE 噪音 (dBA)	73	73	74
CAPACITOR 电容 (μF/450V)	-		
ROTATION 旋转方向	CW ,looking into the end-shield 顺时针, 从端盖端方向看		
INSULATION CLASS 绝缘等级	F		
MOTOR PROTECTION 电机保护	Thermocontact 150±5°C 热保护器		
TEMPERATURE RISE 温升	75K max 运行温升不超过75K		
PROTECTION CLASS 防护等级	IP54		
OPERATING TYPE 工作定额	S1 连续工作制		
AMBIENT TEMPERATURE 适用环境温度	-30°C +60°C		
BEARINGS 轴承型式	Ball bearings 滚珠轴承		
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装		
ELECTRICAL CONNECTION 电源线	Lead wire 1330UL 7G 0.75mm²+2G 0.30mm²; Length 100mm in terminal box connected 接线盒 (7芯0.75mm²+2芯0.30mm²线长100mm)		
APPROVALS 认证标记	CE		
NET WEIGHT/GROSS WEIGHT 净重/毛重	11.0/13.0kg		
PACKING 包装	60*60*22cm		

						SIGN	DATE	TITLE
						DRN. BY		YWF4D-550S-137/50-G
						CHD. BY		
						ENG. BY		PROJECTION 
						APP. BY		
REV.	DESCRIPTION	APPROVED	DATE					